



# Paging


## Scribe Alphanumeric

User Guide

[www.pageonepager.com](http://www.pageonepager.com)



PageOne

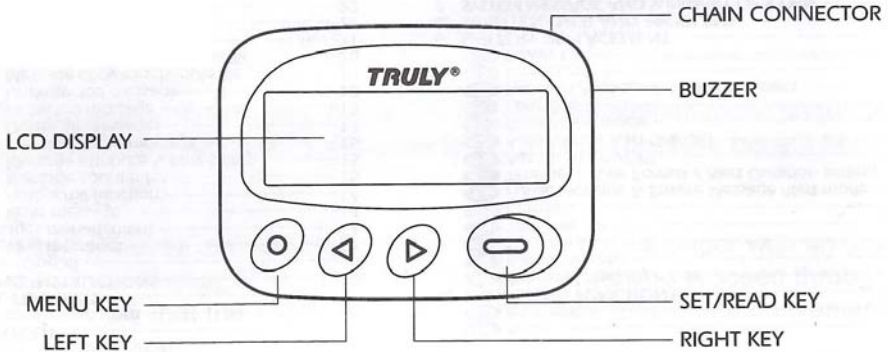

## LCD display and icons

### Standby Screen :



Public  
Message Alert :




Private  
Message Alert :



- ⓘ : Power On
- ⌵ : Reception
- ✉ : Unread Private / Public Message
- ⚡ : Low Battery
- 🔊 : Vibration mode
- 🔇 : Silence mode
- 🔔 : Beep / Melodies Alert mode
- 🕒 : Daily Alarm
- 🕒 : Auto Turn On / Off
- 📧 : Unread Private Message
- ✉ : Unread Public Message
- 🔇 : Auto Silence mode
- 🔒 : Secret Lock

### Icon Screen :



- ↶ : Return to Standby Screen
- ✉ : Public Message file
- 📞 : Data Bank file
- 📅 : Schedule file
- 📅 : Full Calendar
- 📞 : Public / Private Message / Alert
- 🕒 : Time and Date Set / 📄 Data format / ⌚ Alert Duration
- 🕒 : Auto Turn On / Off
- 🔇 : Auto Silence Turn On / Off
- 🕒 : Daily Alarm
- Ⓐ : Font Size
- 🔗 : Speed of Auto-scroll / Ⓢ Speed of Contrast
- 🔒 : Secret Lock
- 🔇 : Power Off

## MEMORY CAPACITY



### ■ Private / Group message area

- Three types of alert can be selected by the user: sound / melody, vibrator and silent (no sound, no vibrating).
- Sound alert of group address is fixed at only one periodic beep sound.
- The duration of alert can be selected by the user: 4 / 8 / 12 / 16 / 20 second.
- Message can store up to 6626 alphanumeric characters.
- Up to 13306 alphanumeric characters can be stored in this area.
- Up to 80 messages can be stored.
- Up to 40 messages or 6626 alphanumeric characters can be protected.
- One message / all messages delete.

## OPERATING INSTRUCTION

### Power ON/OFF



#### ■ Power ON

- Press  key, wait until the screen shows " POWER ON ? "
- Press  key to confirm.

- The screen will show the standby screen in the normal condition.

#### ■ Power OFF

- Press  key to icon screen.
- Press  key to select the  icon, then press  key to display " POWER OFF ? ", press  again to confirm.



## Message management

### a. Read message

- Press ◀ ▶ keys to enter the message counter list or press ⏪ key direct to read the first message
- Press ◀ ▶ keys or ⏪ key to read messages
- Press ◀ ▶ keys and hold to scroll all messages in fast motion


### b. Auto-scroll function ( 🏎 ) Private message

The user is allowed to select 13 level speed for scrolling the messages.

- Press ⏪ to icon screen.
- Press ◀ ▶ keys to select 🏎 icon and press ⏪ key to engege.
- Press ◀ ▶ keys to select the speed and press ⏪ key to confirm.

### c. Message counter list

- Press ◀ ▶ keys to activate the message counter list menu
- Press ◀ ▶ keys to select the particular message and press ⏏ key to read it.

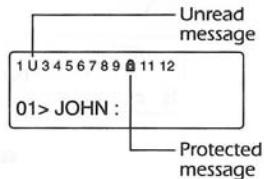








Note : The list also appears at the end of message. The message counter list is also available in public message file, Data bank and scheduling.


### d. Message attribute & time stamp

- ☰ Repeat    ✉ Mail drop

**e. Delete a single message while reading the message**








- Press  key
- Press  key once to select the Single Message Delete icon  , press  key to show "DELETE?"
- Press  key again to confirm






Note : In any case, if you press a wrong bottom or want to abandon the task, press the  key to return to the standby screen.



## f. Delete all messages

- Press  key or  key to enter the message screen
- Press  key then  key to select the Delete All Messages icon , press  key to show "DELETE ALL?"
- Press  key again to confirm



Note : In any case, if you press a wrong bottom or want to abandon the task, press the  key to return to the standby screen.

### g. Protected message


- Press ◀ ▶ keys or ⏪ key to select a message
- Press 🔍 key then ◀ key to select the protected message icon 🔒
- Press ⏪ key to confirm

Note : Total 40 messages or 6626 alphanumeric can be protected.







### h. Unprotected message









- Press ◀ ▶ keys or ⏪ key to select a protected message
- Press 🔍 key then ◀ key to select the unprotected message icon 🔓
- Press ⏪ key to confirm




## Alarm




- Press  key then  key to select Alarm icon  , press  key to set alarm.

### ■ Set alarm with alert







- Select the alarm number 1, 2, 3, 4 or 5 by   keys
- Press  key to start alarm setting
- Press   keys to set On ( ) and press  key to confirm, use keys to set time and alert mode and tone, press  key to confirm each input.



## Time Set / Date Format / Alert Duration Setting ( )








Press   keys to select  icon and press  key to confirm.

### Time setting

- Press  key to select the Time icon  and press  key to activate the time setting
- Press   keys to set the value and press  key to confirm each input.





28 / 7 / 2000  
am 6 : 30 12 hr

### Date format


- Press  key then  key to select the Date format icon  and press  key to activate the date format
- Press   keys to select the format and press  key to confirm

28 / 7 / 2000 (D/M/Y)  
7 / 28 / 2000 (M/D/Y)  
2000 / 7 / 28 (Y/M/D)

## Font size ( A A )

- Press  key to select font size icon A A
- Press   keys to select Large or Regular font size and press  key to confirm

Note : Optional program by operator, please consult your local operator.  
When the function is supported, the user is allowed to select the regular or large font freely.  
Large font mode displays 15 Alpha-characters x 2 lines.  
Regular font mode displays 20 Alpha-character x 4 lines.




## BATTERY REPLACEMENT

When the battery is weak, the user will be alerted by tone and Low Battery icon  is displayed on the Standby screen.

(The alert tone and icon will disappear only when a fresh battery is replaced)

**How to replace a fresh battery ( 1.5V x 1 "AAA" size alkaline battery cell )**

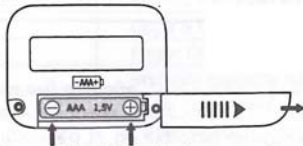

**Warning :** A fresh battery must be put in within 5 minutes, otherwise the entire data and memory could be erased.

## SYSTEM MESSAGE AND SUMMARY OF ICONS

### ■ System message

< No message >	No message in memory.
Delete?	Delete a single file.
Protect full !	Protect memory full
Copy ?	Copy a file to the particular area
Power off ?	Pager Off
Memory full !	Memory capacity full
Copy O.K.	Copy completed
Message Exist !	Copy message already Exist
< Low Battery ! >	Low Battery indication

Power On ?	Pager On
Confirm	O.K.
Incorrect Password :	Re-enter the right Password
Set Password :	Select Own password
Input Password :	Enter the Password
Edit Password :	Change the Password
Private Alert :	Private Message Alert
Public Alert :	Public Message Alert
Unit locked ! Please return to manufacturer !	Pager has been locked for some reason. Please contact your paging operator or manufacturer for detail



Locked ! Please call station !	Pager has been locked for some reason. Please contact your paging operator for detail
Welcome in service	Pager in paging network again
Please call station !	Contact your paging operator for detail


## ■ Summary of icons

 : Unread Private Message

 : Unread Public Message

 : Private / Public Message Alert

 : Beep / Melodies Mode

 : Vibration Alert Mode

 : Silent Alert Mode

 : Delete All Message

 : Delete One Message


 : Protected Message

 : Unprotected Message


 : Large / Small Font Select


 : Large Font

 : Small Font

 : Contrast / Speed of Auto-scroll












 : Contrast Level










 : Speed of Auto-scroll

 : Time Set / Date Format / Alert  
Duration Select

 : Time Set

 : Date Format

	: Esc
	: Databank
	: Schedule
	: Edit Schedule Time
	: Duplicated Message
	: Five Alarms
	: Daily Alarm
	: Auto-power On
	: Auto-power Off
	: Auto-silence On
	: Auto-silence Off

	: Alert Duration
	: Unit Off
	: Secret
	: Disable Secret
	: Auto-on time / Auto-silence starting time
	: Auto-off time / Auto-silence ending time
	: Unread Private / Public Message
	: Out of reception range
	: Power On